


Assembly Instructions

1 IDENTIFY THE FIXING AREA,
AND CLEAN
WITH ALCOHOL PADS PROVIDED

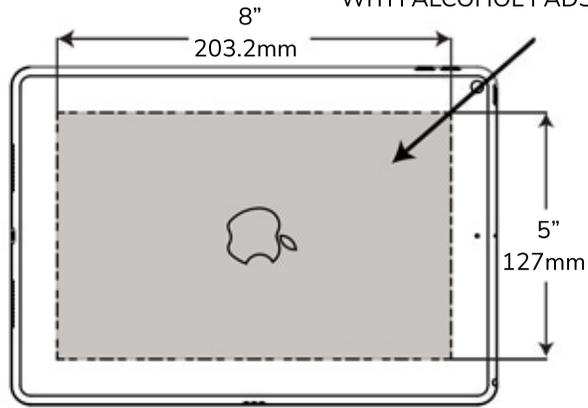

2 PEEL COVER
TO EXPOSE
ADHESIVE PAD

PEEL COVER
TO EXPOSE
ADHESIVE PAD

3 INSTALL MOUNT,
CENTERED
ON THE CLEANED AREA

INSTALL MOUNT,
CENTERED
ON THE CLEANED AREA

ACHIEVES FULL STRENGTH
AFTER 12 HOURS


4 REMOVE MOUNT FROM DEVICE
BY REMOVING M4 PIN TORX SCREWS
USING PROVIDED T-15 SCREWDRIVER

5 INSTALL MOUNT ON
ANY 100mm VESA COMPATIBLE STAND OR ARM
USING PROVIDED M4x10mm PHILLIPS PAN HEAD SCREWS

RISE POLE STAND SHOWN


Assembly Instructions

6

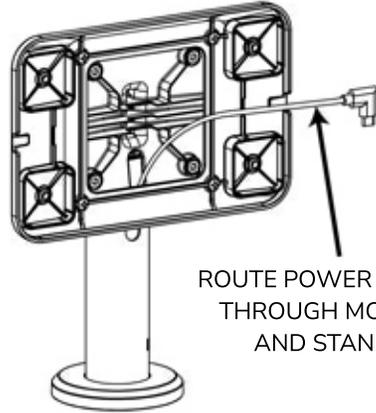

ROUTE POWER CABLE
THROUGH MOUNT
AND STAND



7

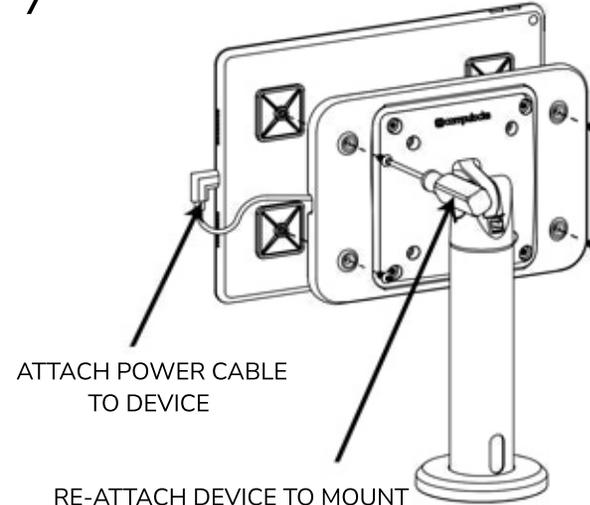

ATTACH POWER CABLE
TO DEVICE


RE-ATTACH DEVICE TO MOUNT
WITH M4 PIN TORX SCREWS
USING PROVIDED T-15 SCREWDRIVER

8

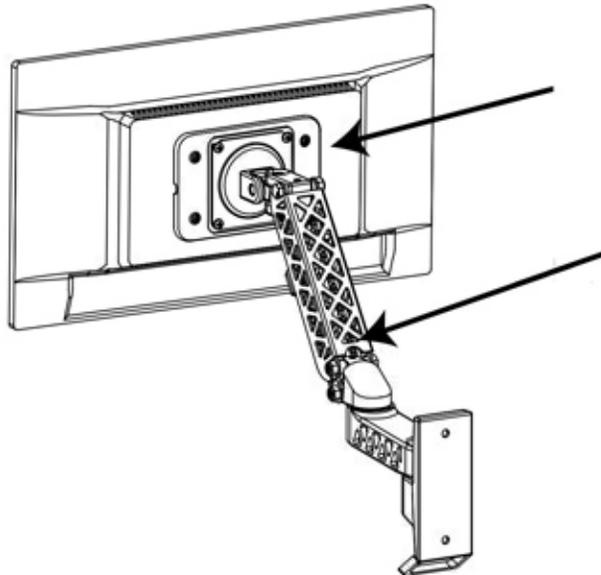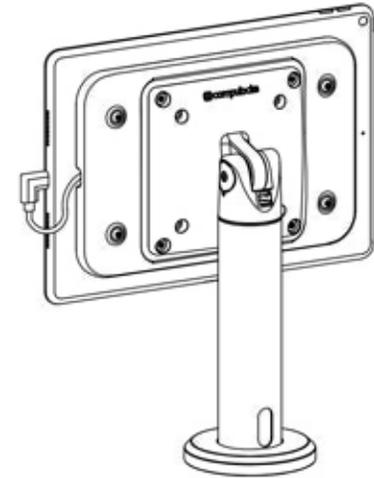

IT MOUNT CAN FIX TO ANY
LAPTOP OR TABLET

IT MOUNT IS COMPATIBLE WITH ANY
100mm VESA STAND, ARM OR MOUNT

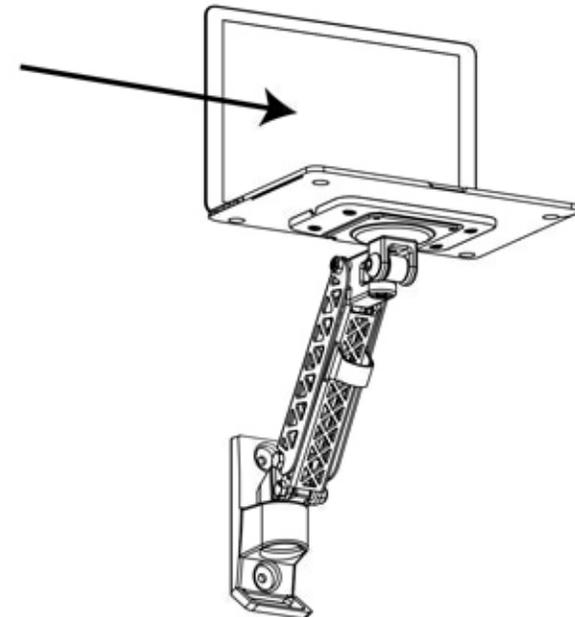

Compatible With All Compulocks' Stands

