


CHOOSE ONE MOUNTING METHOD BELOW BASED ON YOUR SETUP:


1 Floor Mounting (Standard)

SCREW THE BOTTOM PLATE TO THE FLOOR USING
APPROPRIATE SCREWS FOR
YOUR FLOOR TYPE (NOT PROVIDED)

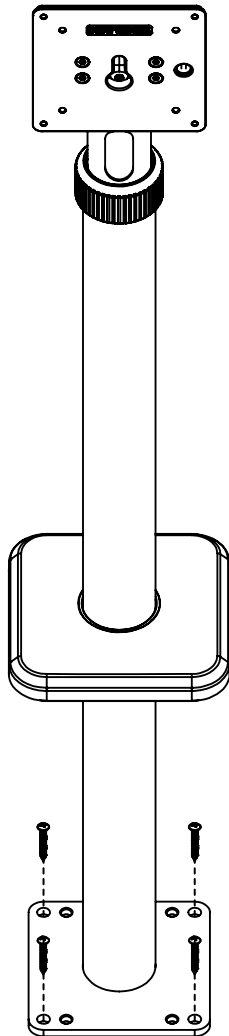


1A Free Standing (Optional Large Base)

Use this option for added stability when freestanding.

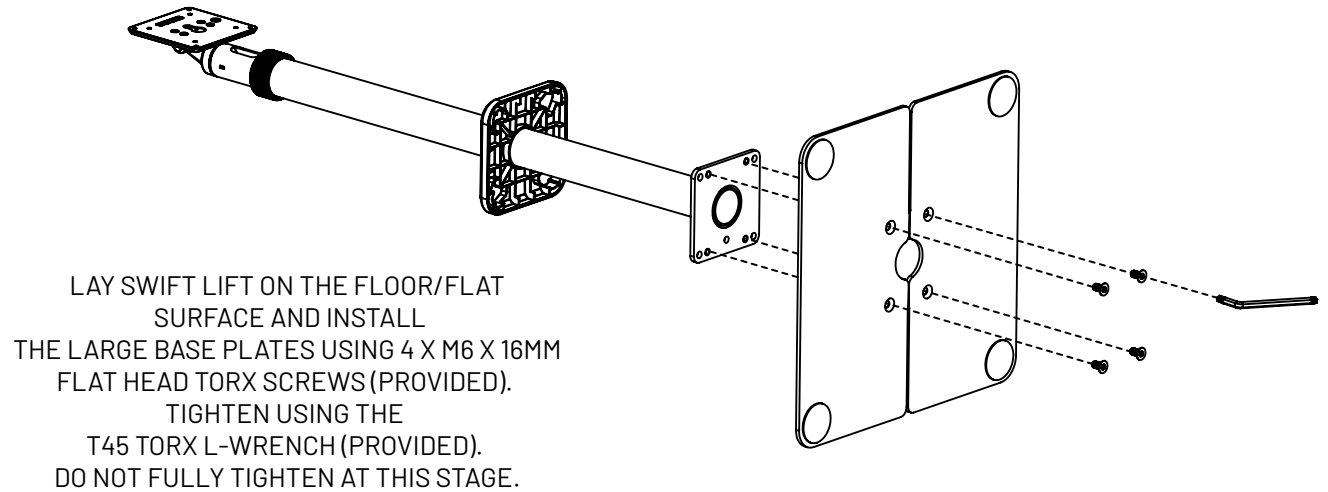

1A - Continued

INSERT THE ALIGNMENT SPACERS BETWEEN THE LARGE BASE PLATES AS SHOWN,
THEN FULLY TIGHTEN ALL SCREWS SECURELY USING THE PROVIDED T45 TORX L-WRENCH.

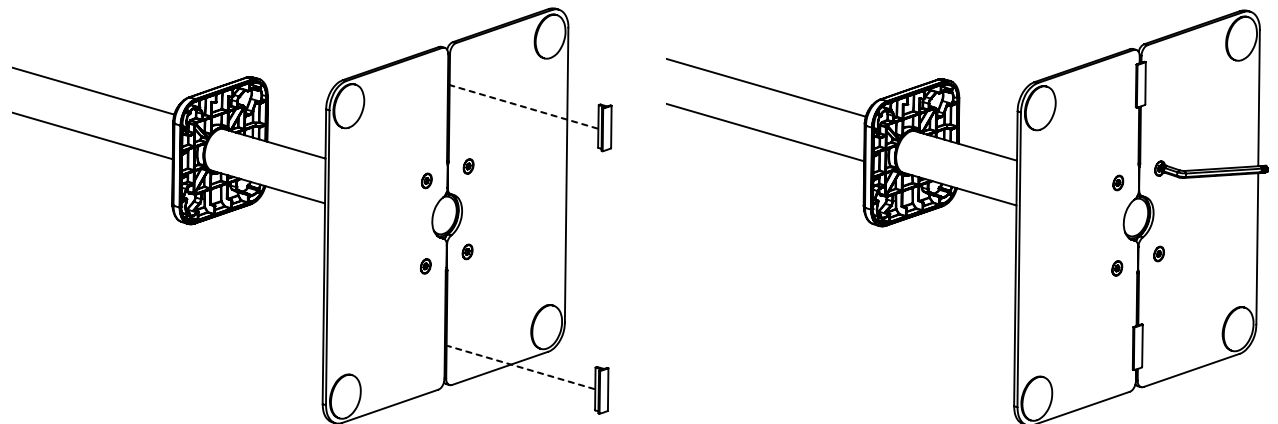


2

LOOSEN KNOB TO ADJUST
POLE TO DESIRED HEIGHT.


- MIN HEIGHT: 35.4IN / 900MM
- MAX HEIGHT: 55.1IN / 1400MM
- DO NOT RAISE THE POLE PAST THE "MAX" MARK.

TIGHTEN SECURELY ONCE HEIGHT IS SET.

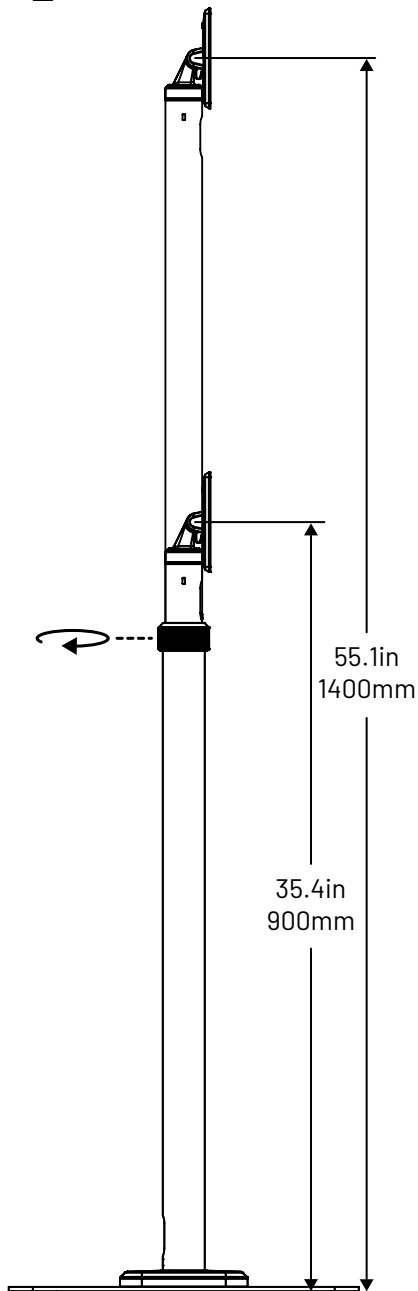


3

ROUTE CHARGING CABLE
THROUGH THE STAND AS SHOWN

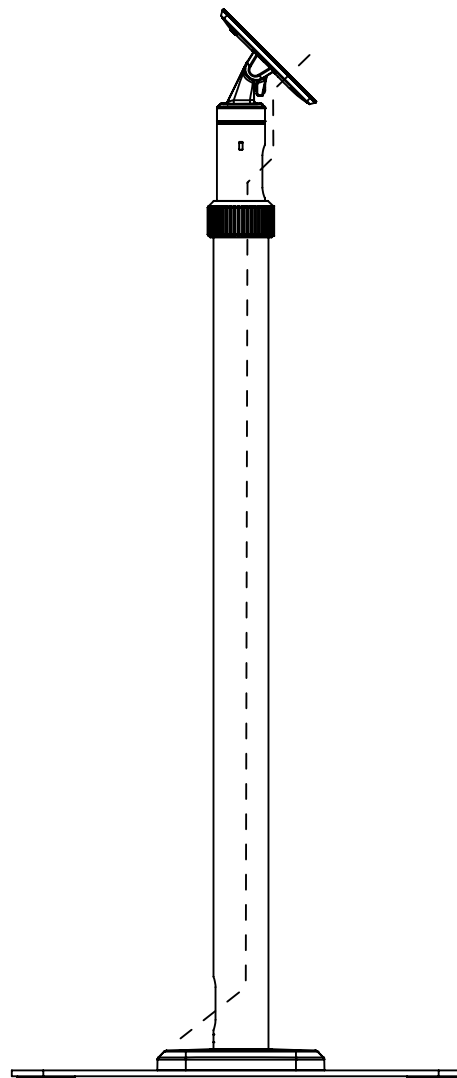

4

INSTALL ENCLOSURE/VESA MOUNT TO
STAND USING M4 X 8MM
PHILLIPS PAN HEAD SCREWS (PROVIDED).

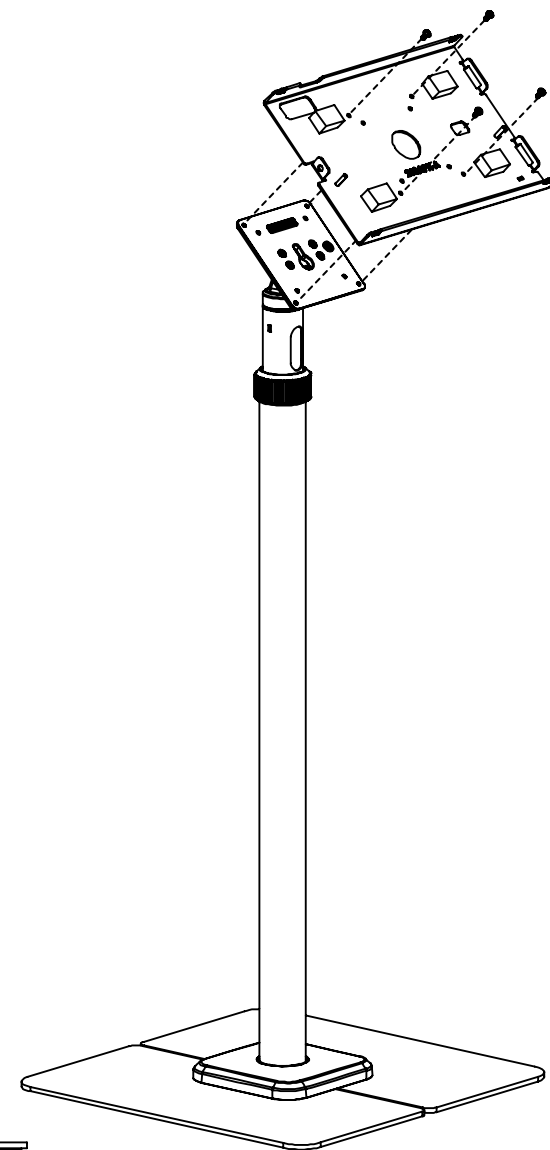


5

Adjustments


In The Box

INSTALL THE ENCLOSURE TOP PLATE/VESA MOUNT PER ITS INSTRUCTIONS.

ADJUST HINGE TENSION USING THE T30 TORX L-WRENCH (PROVIDED)



M4 X 8mm
Phillips Pan Head Screws



T30 TORX L-Wrench




Alignment Spacers




M6 X 16mm
Flat Head TORX Screws





T45 TORX L-Wrench

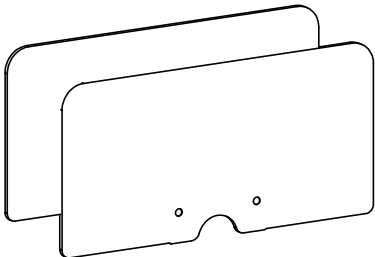

Large Base Plates

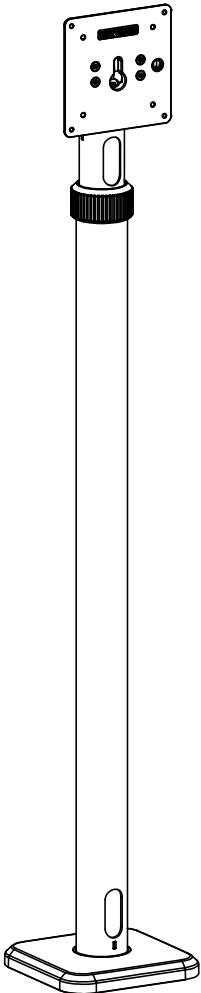


Swift Lift Pole

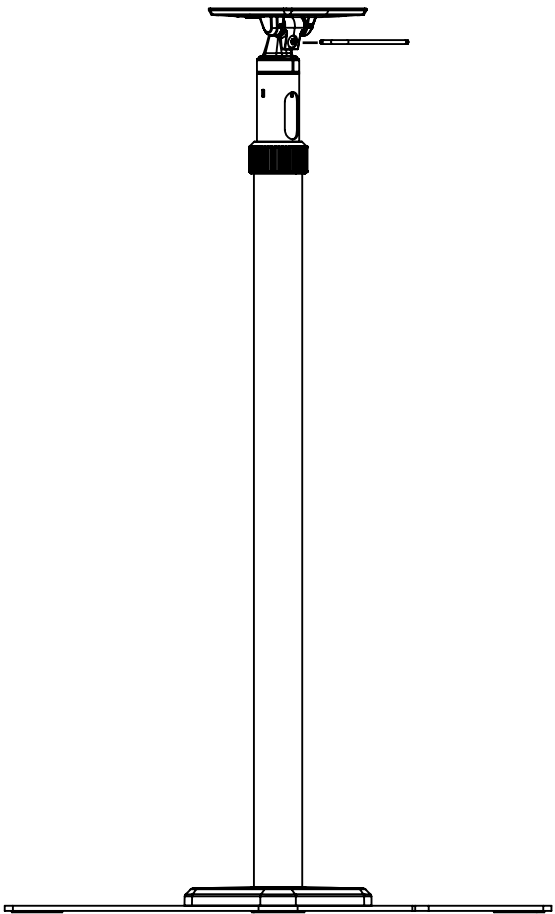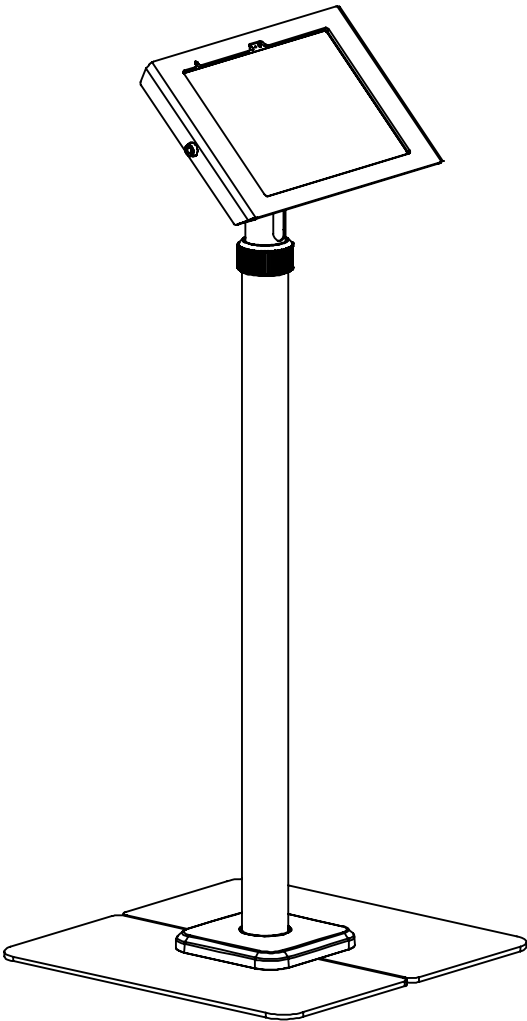


Mounting Options

1 Floor Stand Mounting

USE M4 x 10mm PIN-IN-TORX
BUTTON HEAD SCREWS PROVIDED.
TIGHTEN USING PROVIDED
TORX SCREWDRIVER

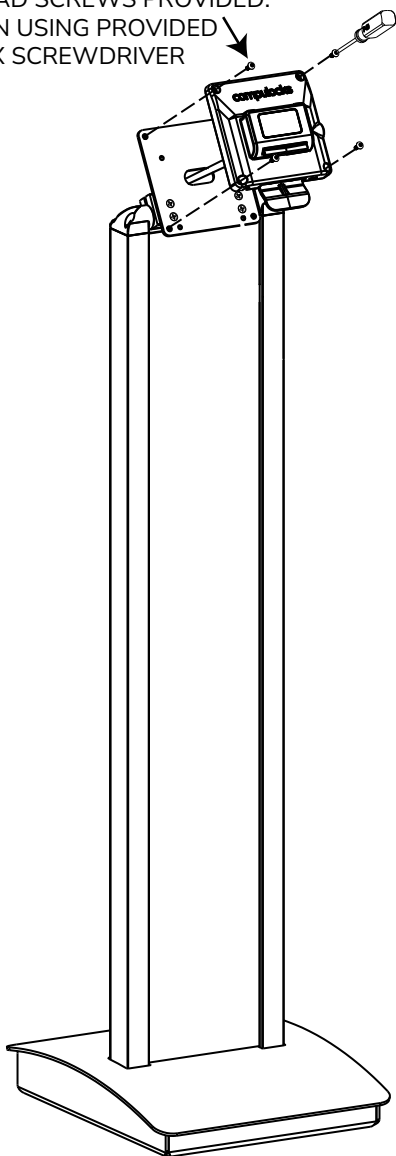


2 Counter Stand Mounting

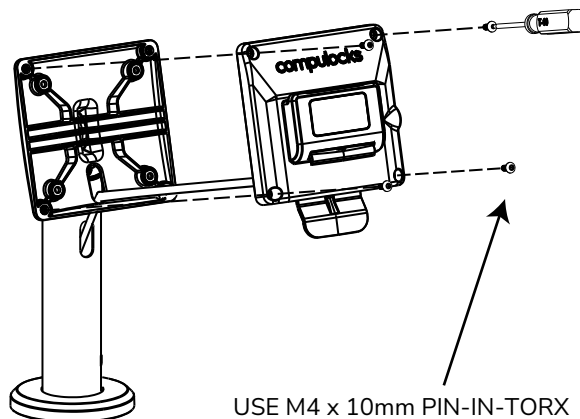


USE M4 x 10mm PIN-IN-TORX
BUTTON HEAD SCREWS PROVIDED.
TIGHTEN USING PROVIDED
TORX SCREWDRIVER

3 Wall Arm Mounting

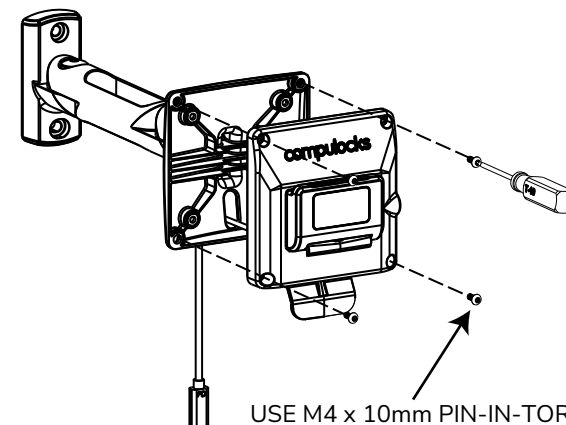


USE M4 x 10mm PIN-IN-TORX
BUTTON HEAD SCREWS PROVIDED.
TIGHTEN USING PROVIDED
TORX SCREWDRIVER

4 Direct Mounting To Wall

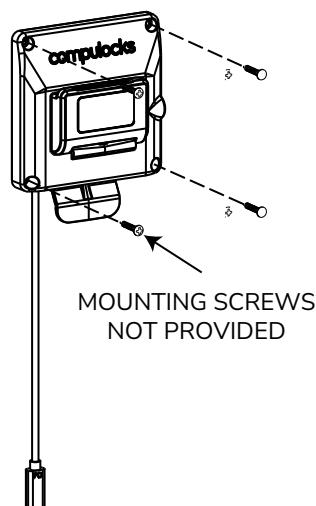

MOUNTING SCREWS
NOT PROVIDED


Optional Add-On: Portrait To Landscape Rotation Plate

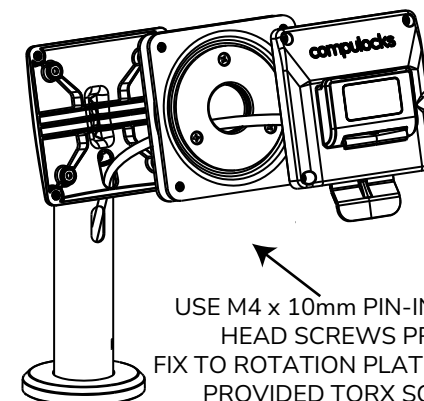

USE M4 x 10mm PIN-IN-TORX BUTTON
HEAD SCREWS PROVIDED TO
FIX TO ROTATION PLATE. TIGHTEN USING
PROVIDED TORX SCREWDRIVER.
USE SCREWS PROVIDED WITH ROTATION PLATE
TO SECURE TO STAND or ARM


Placing Tablet with Connector to Dock Station

1

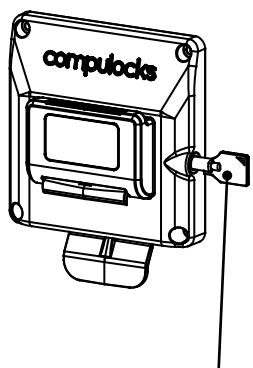


USE KEY TO UNLOCK THE LOCK.
REMOVE KEY

2

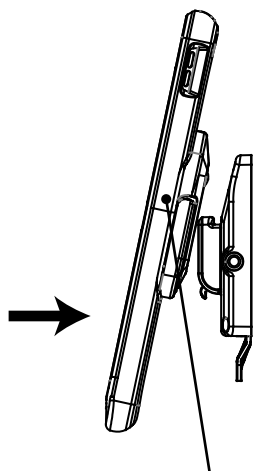


ALIGN CONNECTOR TO DOCK STATION

3

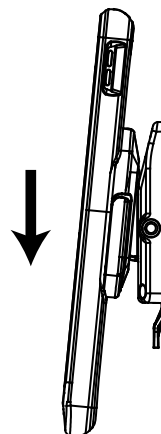

APPLY LIGHT PRESSURE.
LATCH WILL ENGAGE


4

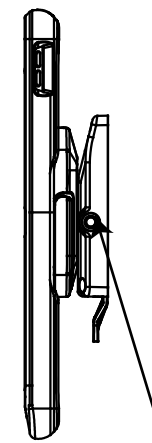

PUSH LOCK BUTTON TO SECURE
TABLET TO DOCK STATION


Removing Tablet with Connector from Dock Station

1

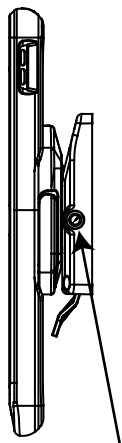


PRIOR TO PULLING LATCH,
UNLOCK LOCK USING KEY

2

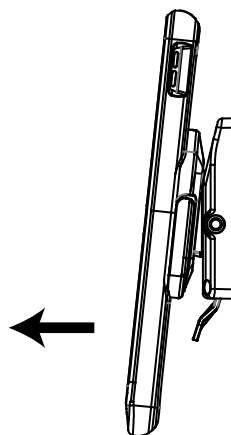

PULL LATCH FORWARD

3

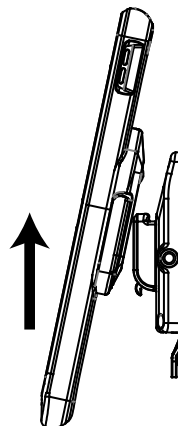



GENTLY PULL UP TO RELEASE

4



Tablet Charge PD Compatible


Tablet Data and Charge PD Compatible

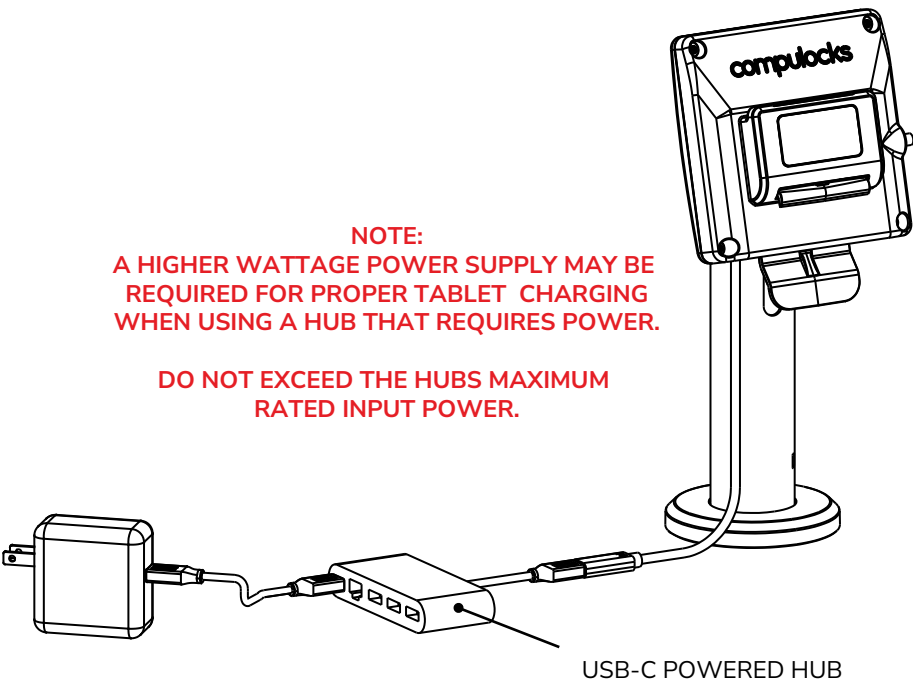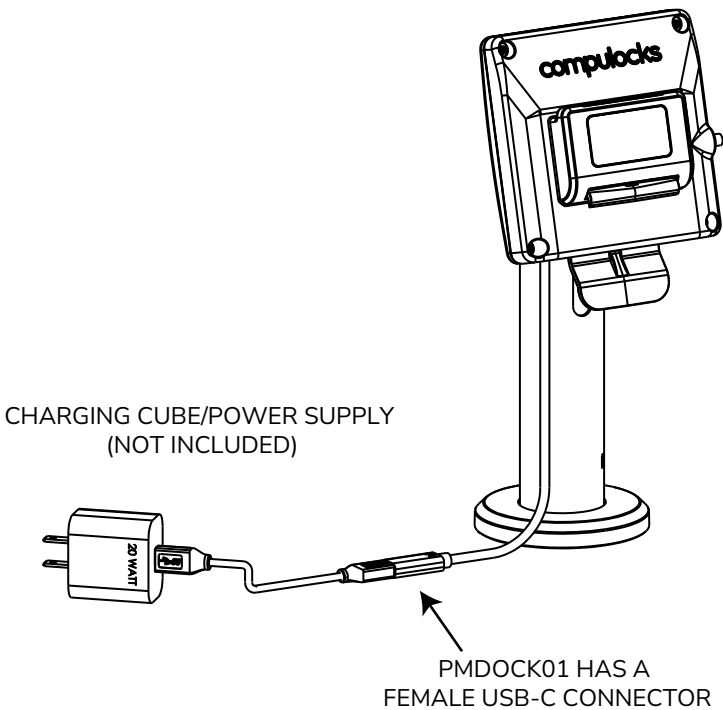


IN THE BOX







Keys




Hardware Kit



PowerMove Dock Station

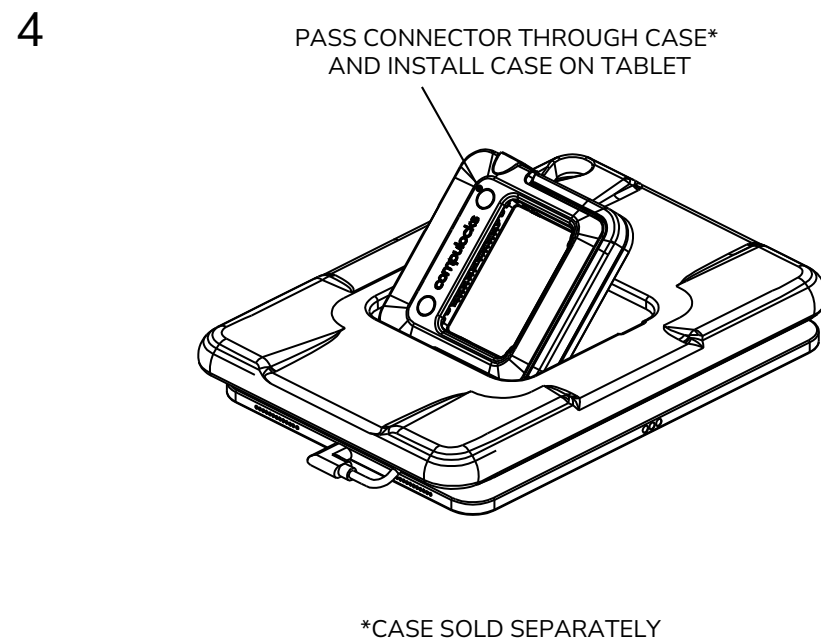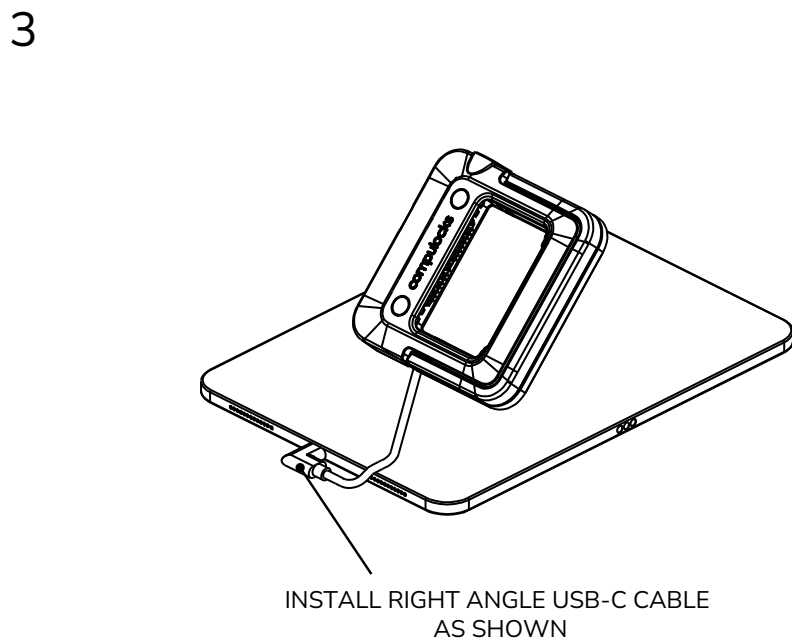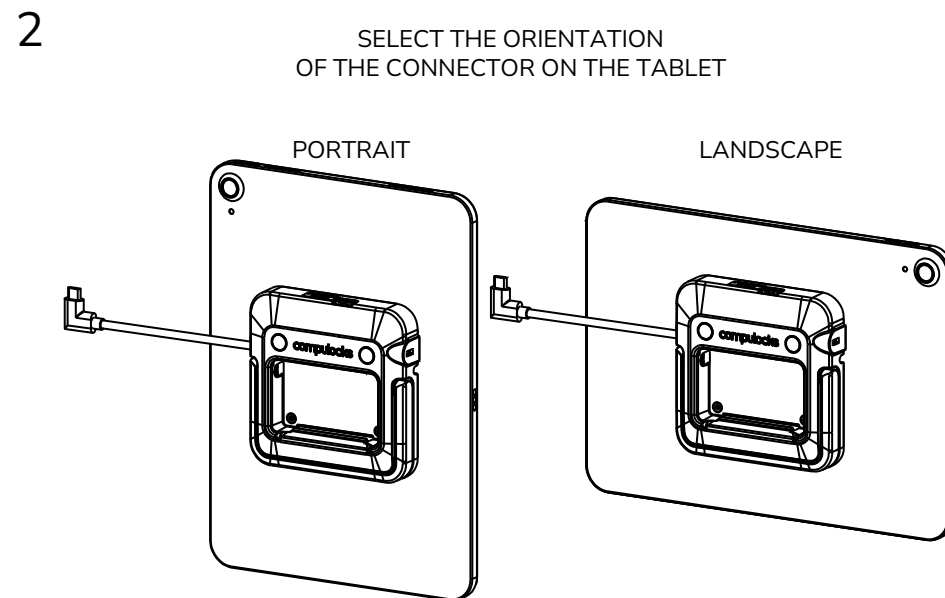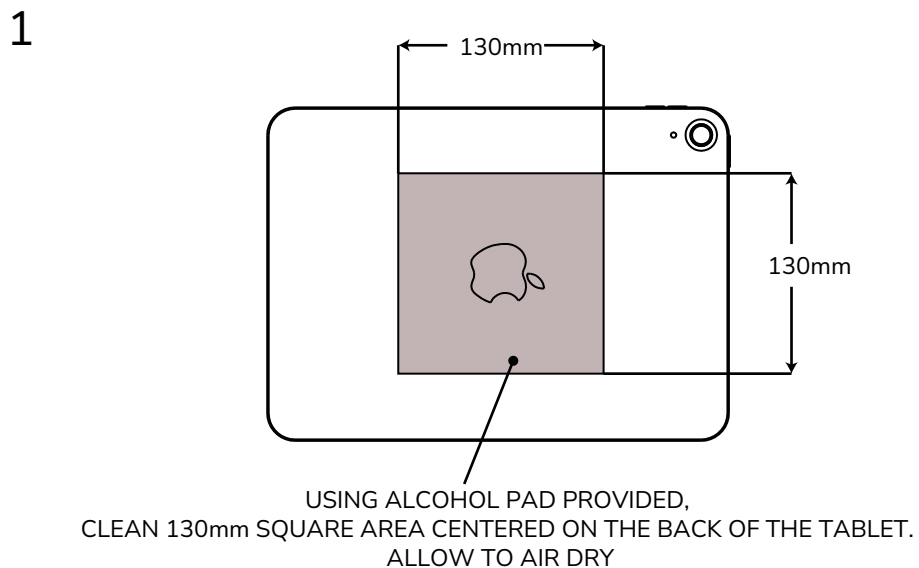


5

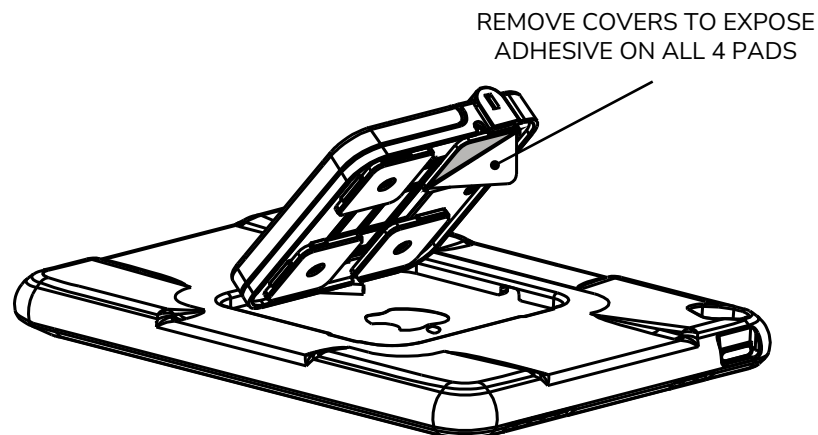


NOTE:
TABLET AND CONNECTOR SHOULD BE AT
ROOM TEMPERATURE FOR BEST RESULTS

6

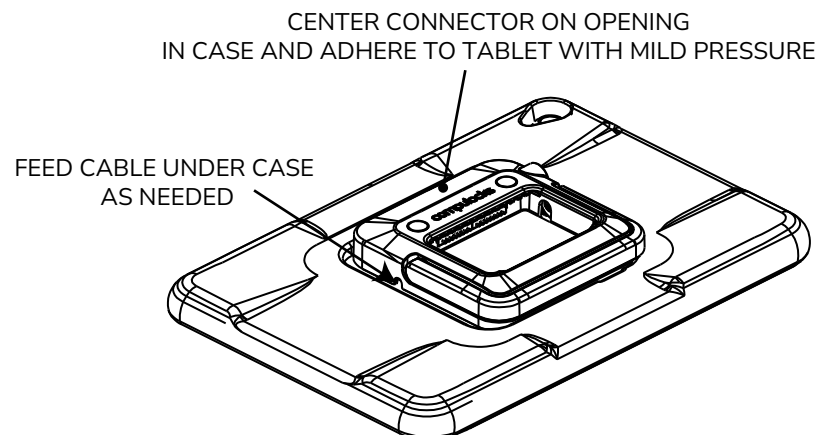


FOR BEST PERFORMANCE ALLOW
CONNECTOR TO BOND TO TABLET FOR 12 HOURS.

IN THE BOX



Alcohol Wipes



PowerMove Connector